



CONSTRUCTION & MATERIALS

- Dia-casting aluminum alloy housing, fully sealed to be dirt and bug proof
- Impact-proof and shatter-proof glass cover
- IP 65 rating waterproof protection
- Polyester powder-coated finish, rust and corrosion proof, stabilized to extreme climate changes without cracking or peeling
- Internal UL approved power supply
- Adjustable projection direction 0-90 degree

MOUNTING AND WIRING

- Mount directly over a standard outlet box or for surface wiring via any of the 3 convenient 3/4 inch threaded conduit entry hubs.

ENVIRONMENTAL SYSTEM

- Outdoor wet/damp location

FINISH

- Bronze

ELECTRICAL SYSTEM

- Input voltage 100-277VAC or 347-480VAC
- ETL/cETL/CE/Rohs

OPTICAL SYSTEM

- 120 lm/w output efficiency
- Color temperature: 3000K, 4000K and 5000K. Other color temperature available for special order, consult factory for lead time.
- Outdoor Cutoff Wall-Mounted Area Luminaires

LIGHTING CONTROL

- 0-10vdc dimming available
- Motion sensor available
- Photocell available

WARRANTY

5 Years




LT-WPSLB Series LED WALL SECURITY LIGHT

Slim LED Wall Security Lights provides dia-casting aluminum alloy heat sink and tempered glass refractor. Adjustable direction can be available from 0-90 degree. Powder-coating finished housing and sealed gasket for Ip65 rating especially are suitable for outdoor corrosion and wet/ damp location. Motion sensor and photocell sensor can be optional application for building, parking lot lighting, square, road and others.


Performance

Light Output: 100-120 lumens/watt
Input Power: 20W, 30W, 70W, 100W
CRI: 70
CCT: 3000K, 4000K, 5000K, 6000K
Beam Angle: 90°
Finish: Bronze
Input Voltage: 100-277vac
Warranty: 5 years
Mounting: Surface mount
Weight: 2.1-5 Kg
Projection Direction : 0-90°
Certificate : ETL/cETL certified, CE/RoHs

Adjustable Direction

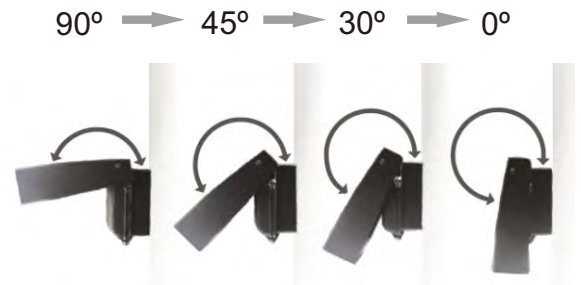


Dimension (mm)

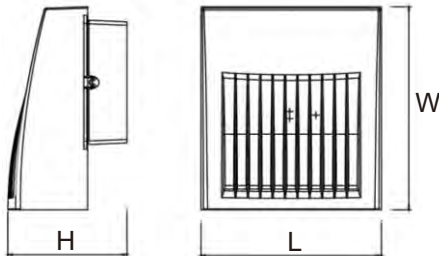

Mode #	Length (mm)	Width (mm)	Height (mm)
LT-WPSLB-20W/30W	167	201	90
LT-WPSLB-70W/100W	240	285	160

Distribution

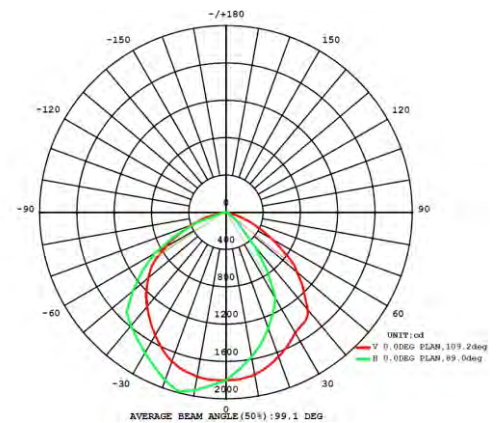

Order Information

Sample Number: LT-WPSLB-30W-30K-BK-DM

Com.	Family Name	Wattage	Voltage	CCT	Finish	Control Mode
LT	WPSLB	20W	Blank=100-277VAC	30K=3000K	Blank=Brown BK=Black	DM=0-10VDC Dimming PC=Photocell MS= Motion sensor
Lightide	Wall Pack Slim Profile	30W		40K=4000K		
		70W		50K=5000K		
		100W		57K=5700K		

MORE QUALIFIED PRODUCTS, PLEASE CONTACT

sales@lightide-tech.com
<https://www.lightide-tech.com>
 Lightide Manafactory Co., Ltd All right reserved.



LIGHTIDE 