

LED VAPOR TIGHT LIGHTS EMERGENCY BACKUP



EXCELLENT CONSTRUCTION & MATERIALS

- ↘ IK09 & 5VA shatter-proof polycarbonate housing
- ↘ IP 65 waterproof protection for wet and damp location usage
- ↘ Milky or clear strip cover
- ↘ Stainless steel clips
- ↘ Emergency battery Ni-MH or Lithium
- ↘ Photocell or motion sensor available
- ↘ L70 > 60,000 hrs
- ↘ Emergency time 90 min. ~180 min.
- ↘ Charge time: 24 hrs
- ↘ Charge cycle: >500 times

MANY INSTALLATION MOUNTING

- ↘ Surface mounted

CERTIFIED GUARANTEE

- ↘ ETL/cETL, DLC premium
- ↘ CE/RoHs

ELECTRICAL SYSTEM

- ↘ Widely Input voltage: 100-277VAC
- ↘ Power from 20W to 100W

MANY OPTICAL SYSTEM OPTION

- ↘ Beam angle: 120°
- ↘ Up to 150 lm/w output

LONG WARRANTY

5 Years

LED VAPOR TIGHT LIGHTS EMERGENCY BACKUP

LED Vapor Tight Light Emergency backup feature Ni-MH or Lithium battery with discharging time 90~180 min. IK09 and 5VA rated shatter-proof polycarbonate housing is coming with milky or clear strip cover for option. IP65 rating LED light fixtures are suitable for indoor or outdoor wet/damp usage. High lumen output level up to 150 LPW of led vapor tight light fixtures usually are applied for storage areas, warehouses, shops and garages etc.

Performance

Light Output Efficacy: 130-150 lumen/watt
Input Power: 20/38/50/100 watts
CRI: 80
CCT: 3000K, 4000K, 5000K, 6000K, 6500K
Finish: White
Input Voltage: 100-277vac
Warranty: 5 years
Mounting: Surface mount
Weight: 2.0 Kg
Discharging Time: 90~180 min.
Charge time: 24 hrs.
Certificate : ETL/cETL certified, CE & RoHs
 DLC premium

Cover Option

Clear Strip Cover




Milky Cover




Dimension

Unit:mm

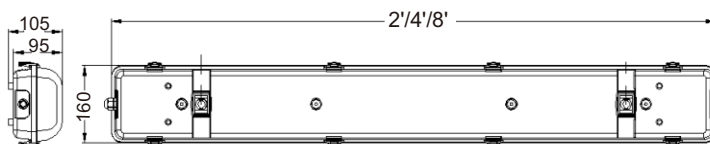

Distribution

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

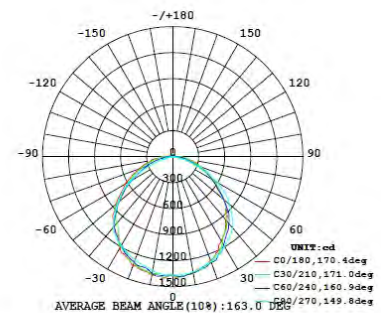

Order Information

Sample Number: LT-TPA456-27K-EM-C

Com.	Family Name	Length	Wattage	CCT	Voltage	Control Mode	Bracket	Cover
LT	TPA	2=2FT	20=20W	27K=27000K	Blank=100-277VAC	DM=0-10VDC Dim	Blanket=Surface mount	M=Milky
Lightide	Vapor Tight Light A Type	4=4FT	36=38W	30K=3000K	HV= 347VAC	PC= Photocell MS= Motion sensor EM=Emergency Backup		C= Clear
		8=8FT	56=50W	40K=4000K				
			80=80W	50K=5000K				
			100=100W	60K=6000K 65K=6500K				

MORE QUALIFIED PRODUCTS, PLEASE CONTACT
 sales@lightide-tech.com
 https://www.lightide-tech.com
 Lightide Manufactory Co., Ltd All right reserved.

