



CONSTRUCTION & MATERIALS

- Heavy duty die-cast aluminum housing, fully sealed to be dirt and bug proof
- Up to 12.8 Kg max.
- New Up-Down Penetrative heat sink design to optimize thermal transfer and maximize performance and life of LED
- IP 66 waterproof protection
- Seven kinds of mounting adapters for option
- L70: 60,000 hrs
- Photocell mode available

MOUNTING

- Install directly onto the pole or surface with optional adapters.

FINISH

- Bronze

ENVIRONMENTAL SYSTEM

- ETL/cETL/DLC listed for outdoor wet/damp locations

ELECTRICAL SYSTEM

- Integral LED driver with 10KV surge protection line-earth
- Input voltage 120-277VAC, 50/60Hz (250-528VAC available)

OPTICAL SYSTEM

- Light distribution Type II, III, IV and V
- High performance CREE LEDs up to 150 lm/w output

WARRANTY

7 Years


LT-SBAL SERIES LED SHOEBOX AREA LIGHT

LED Shoebox Area Lights provides excellent CREE LED up to 150 lm/w and unique heat sink dissipation design. Powder-coating finish assures corrosion resistance and long-lasting aesthetics. Seven kinds of arm and optional structural rod bracket for different pole mounting. Also Type II, III, IV and V of lens can get different light distribution is available for parking lot lighting, area lighting, pathway lighting, garden lighting and other area sites lighting etc.


Performance

Light Output: 9,000- 46,000 lumens
Input Power: 60/100/150/200/250/320 watts
CRI: 80
CCT: 3000K, 4000K, 5000K
Finish: Bronze
Input Voltage: 100-277vac or 250-520vac
Warranty: 7 years
Mounting: slip fitter, extension arm, bracket
Light distributor : Type II, III, IV and V.
Weight: 12.8 Kg max.
Dimming: 0-10V standard
Certificate : ETL/CETL certified
 DLC premium


ADAPTER OPTION

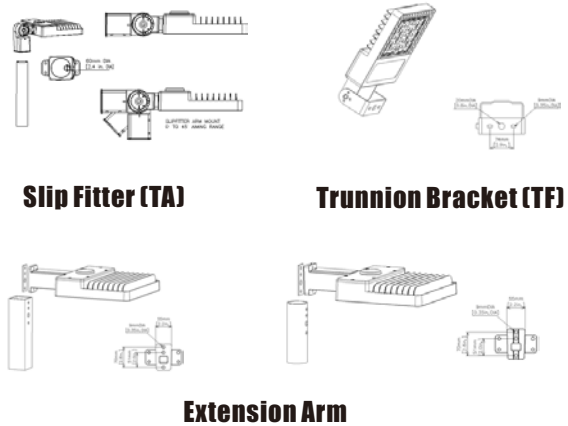

Dimension

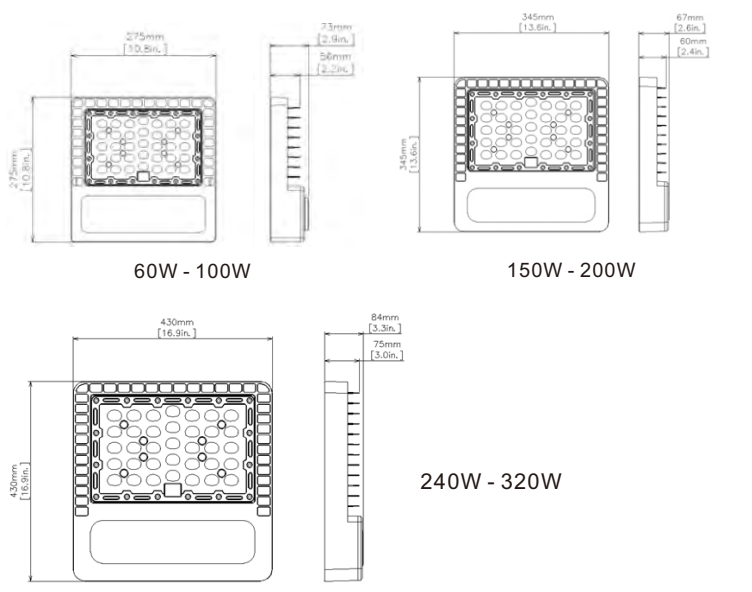

Light Distribution

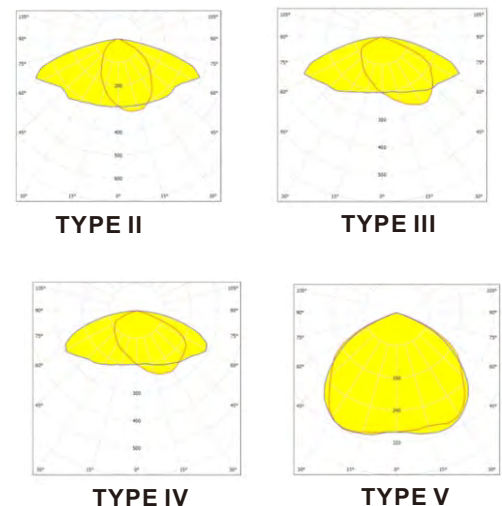

Specification

| Model# | LT-SBAL060 | LT-SBAL100 | LT-SBAL150 | LT-SBAL200 | LT-SBAL250 | LT-SBAL320 |
|--------------------|------------|------------|------------|------------|------------|------------|
| Rated Power | 60W | 100W | 150W | 200W | 250W | 320W |
| Lumen Output (@5K) | 9085 lm | 14661 lm | 22313 lm | 30019 lm | 36632 lm | 46741 lm |
| Finish | Bronze | Bronze | | | Bronze | |

MORE QUALIFIED PRODUCTS, PLEASE CONTACT

Email: sales@lightide-tech.com

<https://www.lightide-tech.com>

Lightide Manufacturing Co., Ltd All right reserved.

